

DHN-54Z16/DG/FS(BB) 480~510W

Full-Screen Double Glass PV Module

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO
ISO 45001
2018/International standards for occupational health & safety
ISO 14001
2015/Standards for environmental management system
ISO 9001
2015/Quality management system

 25 Material & technology warranty

 30 Linear power output warranty



Frameless design, installable both vertically & horizontally,
No water, no dust, snow slide fast, power generation increased by 6-15%



TOPCon cells double-sided rate up to 85% and
more back power generation by 5-25%



Double-glass Technology,
higher encapsulation blocking and mechanical strength




TOPCon cells, lower attenuation,
better temperature coefficient & dim light performance




DHN-54Z16/DG/FS(BB) 480~510W

Design

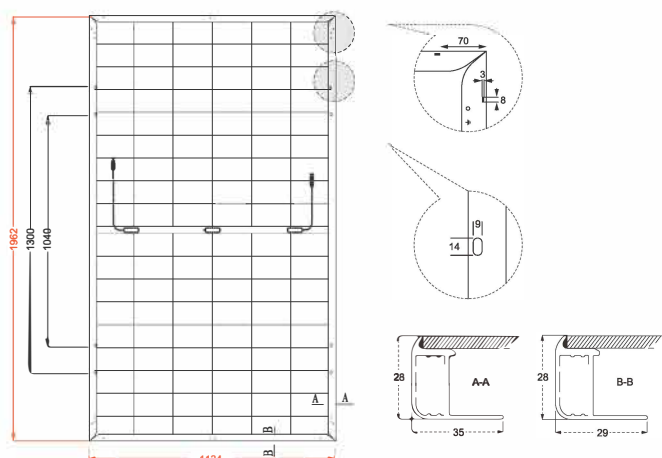

30-Year Linear Power Output Warranty

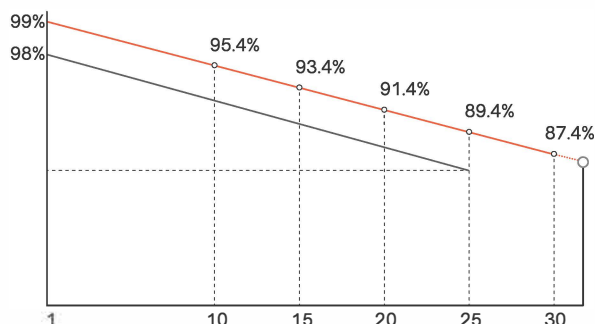

— DAH Solar linear power output guarantee
— Standard linear power output guarantee

Mechanical Specification

No. of Cells	108 (6×18)
Weight	26.4kg
Cells Type	N-type 182×105mm
Dimension (L×W×T)	1962×1134×30mm
Packing	37pcs/Pallet, 888pcs/40HQ

Cable(Including connector)	4.0mm ² , 300/200mm in length, length can be customized
Glass	2.0mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible

Electrical Characteristics

Module Type	DHN-54Z16/DG/FS(BB)													
Test conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	480	361	485	365	490	368	495	372	500	376	505	380	510	384
Open-circuit Voltage (Voc/V)	39.1	37.1	39.3	37.3	39.5	37.5	39.7	37.7	39.9	37.9	40.1	38.1	40.3	38.3
Maximum Power Voltage (Vmp/V)	33.1	31.4	33.3	31.6	33.5	31.8	33.7	32.0	33.9	32.2	34.1	32.4	34.3	32.6
Short-circuit Current (Isc/A)	15.46	12.48	15.52	12.53	15.58	12.58	15.64	12.63	15.70	12.68	15.76	12.72	15.82	12.77
Maximum Power Current (Imp/A)	14.50	11.48	14.56	11.53	14.63	11.58	14.69	11.63	14.75	11.68	14.81	11.72	14.87	11.77
Module Efficiency (STC)	21.57		21.80		22.02		22.25		22.47		22.70		22.92	
Refer Bifacial Factor	80±5%													

STC-Standard Test Environment: Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT-Standard Test Environment: Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Double-Sided Power Generation Parameters (Rear gain)

5%	Maximum Power (P _{max})	504	509	515	520	525	530	536
	Module Efficiency (%)	22.7	22.9	23.1	23.4	23.6	23.8	24.1
15%	Maximum Power (P _{max})	552.0	557.8	563.5	569.3	575.0	580.8	586.5
	Module Efficiency (%)	24.8	25.1	25.3	25.6	25.8	26.1	26.4
25%	Maximum Power (P _{max})	600.0	606.3	612.5	618.8	625.0	631.3	637.5
	Module Efficiency (%)	27.0	27.2	27.5	27.8	28.1	28.4	28.7

Operating Parameters

Maximum System Voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of I _{sc} (α _{Isc})	0.046%/°C
Temperature Coefficient of V _{oc} (β _{Voc})	-0.25%/°C
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.29%/°C
Snow load, frontside / Wind load, backside	5400Pa/2400Pa