

HY-DH96N11B **Bifacial**

435-455W

22.8%

Max. Efficiency

N-Type

Bifacial & Dual Glass

96 Pieces

Half-Cell



Leading Technology

Based on n-type cell and 210R technology platform; Advanced design and manufacturing process; Industry leading reliability and efficiency of mass production



High Power

Bifacial higher power output, lower temperature coefficient and better low light performance; Significantly enhanced power output and lower LCOE






Long-term Reliability

Unsusceptible to LID, LeTID and lower PID degradation; 5400Pa snow load, 2400Pa wind load, and 35mm hail-resistant with 27.2m/s strike



Stringent Quality Control

Durable product structure; Stringent quality control system; Guaranteed after-sales service to ensure long-term reliability

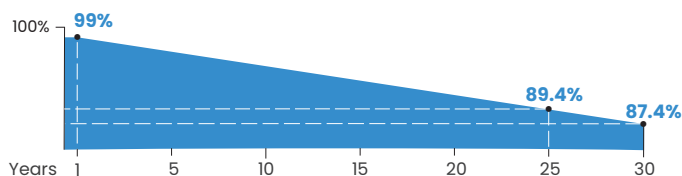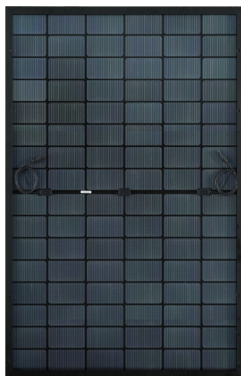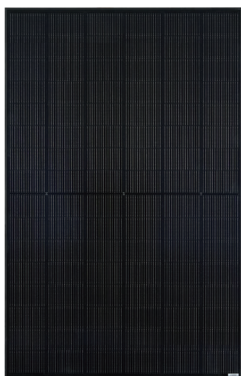

Runergy N-Type Dual Glass Product Performance Warranty

• 1st year degradation <1%, annual degradation <0.4%



25-year product warranty



30-year linear power warranty

IEC61215 / IEC61730 / UL61730 / IEC61701 / IEC62716 / IEC60068 / ISO9001 / ISO14001 / ISO45001



www.runergy.com
sales-inform@runergy.com

Mechanical Parameters	
Solar Cell	Mono N-Type 182*210mm
No. of Cells	96 (6 × 16)
Dimensions	1762 × 1134 × 30mm
Weight	25kg
Junction Box	IP68 rated (3 bypass diodes)
Output Cable	4mm ² (IEC), 12 AWG (UL) ±1200mm or customized
Connector	MC4-EVO2 or similar
Front Cover	2.0mm AR coated heat-strengthened glass
Back Cover	2.0mm heat-strengthened glass
Frame	Black-anodized aluminum
Container	36 pcs/pallet, 936 pcs/40' HQ (Global)

Operating Parameters	
Max. System Voltage	DC 1500V (IEC/UL)
Operating Temperature	-40℃ ~ +85℃
Max. Fuse Rating	35A
Front/Back Max. Loading	5400Pa/2400Pa
Bifaciality	80%±5%
Hail Test	35mm, 27.2 m/s.
Fire Resistance	IEC Class A/ UL Type 29

Electrical Characteristics - STC		Irradiance 1000 W/m ² , cell temperature 25 °C, AM-1.5, Test uncertainty for Pmax: ±3%			
Maximum Power at STC (Pmax/W)	455	450	445	440	435
Power Tolerance (W)			0 ~ +5		
Optimum Operating Voltage (Vmp/V)	29.57	29.44	29.30	29.16	29.02
Optimum Operating Current (Imp/A)	15.39	15.29	15.19	15.09	14.99
Open Circuit Voltage (Voc/V)	35.39	35.26	35.12	34.98	34.84
Short Circuit Current (Isc/A)	16.15	16.07	15.99	15.91	15.83
Module Efficiency	22.8%	22.5%	22.3%	22.0%	22.0%

Electrical Characteristics - BNPI		Irradiance: front 1000W/m ² , rear 135W/m ² , Cell temperature 25 °C, AM-1.5.			
Maximum Power at BNPI (Pmax/W)	501	496	341	484	479
Optimum Operating Voltage (Vmp/V)	29.57	29.44	28.05	29.16	29.02
Optimum Operating Current (Imp/A)	16.94	16.83	12.15	16.61	16.50
Open Circuit Voltage (Voc/V)	35.48	35.35	33.63	35.07	34.93
Short Circuit Current (Isc/A)	17.80	17.72	12.89	17.54	17.45

Rearside Power Gain		(Reference to 450W Front)		
Rearside Power Gain	5%	15%	25%	
Maximum Power (Pmax/W)	473	518	563	
Optimum Operating Voltage (Vmp/V)	29.50	29.54	29.57	
Optimum Operating Current (Imp/A)	16.02	17.52	19.02	
Open Circuit Voltage (Voc/V)	35.32	35.36	35.39	
Short Circuit Current (Isc/A)	16.84	18.42	20.01	
Module Efficiency	23.6%	25.9%	28.2%	

Temperature Characteristics	
Nominal Module Operating Temperature	42 ± 2 °C
Nominal Cell Operating Temperature	45 ± 2 °C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/ °C

Unit: mm (inch)

