



**EIKO
POWER**

NORDIKA SERIES 570W / 590W

NT7 N-Type Rectangle TOPCon Bifacial Ultra Black



Bifacial technology enables additional energy harvesting from rear side (up to 30%)



30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



N-type solar cell has no LID naturally which can increase power generation



Excellent low irradiance performance



Better light trapping and current collection to improve module power output and reliability




Industry leading lowest thermal co-efficient of power




Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient




100% triple EL test enabling remarkable reduction of hidden crack rate of modules

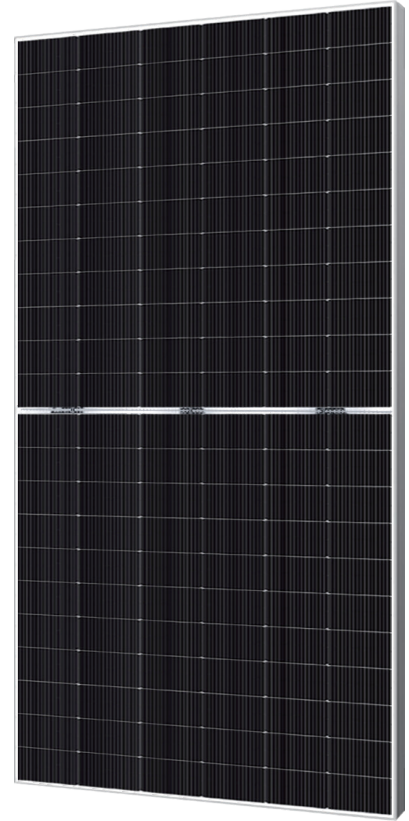

LINEAR PERFORMANCE WARRANTY

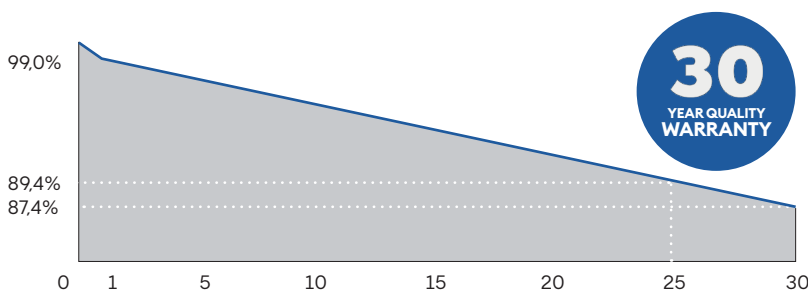

PERFORMANCE INSURANCE



ABOUT EIKO POWER

EIKO POWER is a leading provider of solar modules and batteries, founded in Europe with offices worldwide. We offer a comprehensive range of top-of-the-line, innovative renewable energy solutions, including bifacial solar panels and utility-grade BESS products featuring an AI-powered EMS.



**EIKO
POWER**

ELECTRIC CHARACTERISTICS

NT7 N-TYPE 570/590 W BF

Model of modules	EP570M66-NT7-BF		EP575M66-NT7-BF		EP580M66-NT7-BF		EP585M66-NT7-BF		EP590M66-NT7-BF	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power — P_{mp} (W)	570	429.5	575	433.7	580	437.9	585	442	590	446
Open-circuit voltage — V_{oc} (V)	47.76	45.10	47.97	45.30	48.19	45.60	48.4	45.80	48.61	46.00
Short-circuit current — I_{sc} (A)	15.11	12.17	15.16	12.21	15.21	12.25	15.26	12.29	15.31	12.33
Maximum power voltage — V_{mp} (V)	39.91	37.40	40.12	37.60	40.33	37.80	40.54	38.00	40.75	38.20
Maximum power current — I_{mp} (A)	14.28	11.50	14.33	11.54	14.38	11.58	14.43	11.62	14.48	11.67
Cell efficiency	23.89		24.10		24.31		24.52		24.73	

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C , Spectra at AM1.5, Flash test tolerance + -4 %

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C , Spectra at AM1.5, Wind at 1m/s

ELECTRICAL CHARACTERISTICS WITH 15% REAR SIDE POWER GAIN

Total power Pmax/W	655.5	661.25	667	672.75	678.5
Vmp / V (Total)	39.91	40.12	40.33	40.54	40.75
Imp / A (Total)	16.42	16.48	16.54	16.59	16.65
Voc / V (Total)	47.76	47.97	48.19	48.40	48.61
Isc / A (Total)	17.38	17.43	17.49	17.55	17.61

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	2278x1134x30mm
Weight	32kg
Cell	132 cells,N type Monocrystalline 182.2x99.5mm
Front glass	2.0mm , Anti-Reflection Coating
Back glass	2.0mm , Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction box	IP68 , 3 bypass diodes
Output wire	4mm ²
Wire length	300mm/1300mm/customized
Connector	MC4 Compatible
Packing Specification	36 pcs/Pallet ; 720 pcs/40' HQ




OPERATING PARAMETERS

Power tolerance (W)	(0~+4)
Maximum system voltage (V)	1500
Maximum rated fuse current (A)	30
Current operating temperature (°C)	-40~+85°C
Mechanical load	5400 Pa / 2400 Pa

TEMPERATURE RATINGS

Temperature coefficient (P_{max})	-0.30% / °C
Temperature coefficient (V_{oc})	-0.25% / °C
Temperature coefficient (I_{sc})	0.046% / °C
Nominal operating cell temperature	45±2 °C

MODULE DIMENSIONS (MM)

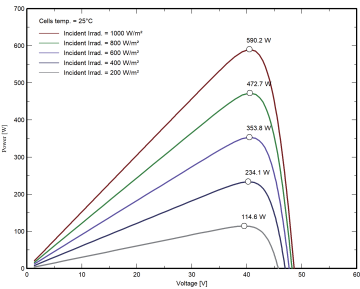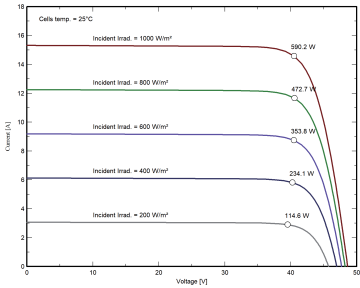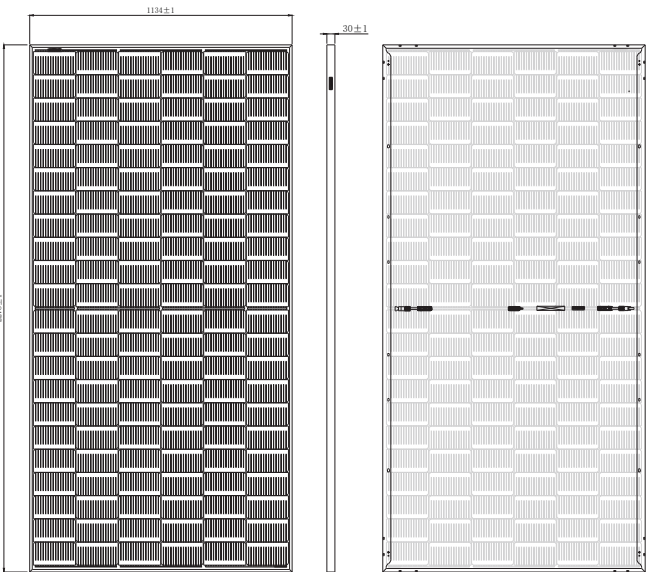

Stabilimento: regione Merconsile, 1
13010 Guardabosone (Vercelli)
support@eikopower.com
www.eikopower.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT
©2024 Eiko Power S.R.L. All rights reserved.
Specifications included in this datasheet are subject to change without notice.
Country of origin: Italy, Vietnam, China